

pressure reduction valve


type HPI 08

3-HPI 08

valve type with pilot valve



control valve manual externally controlled
pressure range PN 0-200 bar
orifice DN 8 mm
connection thread
function manual stepless pressure regulation



⚠ Above stated body materials refer to the valve port connections that get in contact with the media only!

design externally controlled with spring return
body materials ① brass ②
 ③ ⑤
 ⑥
valve seat synthetic resin on metal
seal materials NBR FPM

details needed for main valve

- orifice
- port
- pressure regulating range
- flow rate
- media
- media temperature
- ambient temperature

details needed for pneumatic actuation

- nominal voltage
- type of protection
- actuation pressure range min/max

ports HPI threads G 3/8
function stepless regulation
pressure regulation range bar 10-200
Kv value m³/h max. 1,3
media gaseous - liquid
abrasive media
flow direction A ⇌ B as marked
operating time ms < 100
media temperature °C 0 to +60
ambient temperature °C 0 to +50
approvals
mounting
weight kg 3,6
additional equipment

general specifications

options

electrical specifications

options

nominal voltage U_n 24 V DC
 U_n 230 V 50 Hz AC
power consumption DC 4,8 W
 AC pick up 11,0 VA holding 8,5 VA
protection IP 65 (P54) acc. DIN 40 050
energized duty rating ED 100%
connection plug acc. DIN EN 175301-803 form B
additional equipment illuminated plug with varistor
optional M12x1 connector acc. DESINA connector acc. VDMA
coil 3 positions x 90° / wire diameter 6-8 mm
max. temperature media 60°C
 ambient 50°C
explosion proof EEx m II T5 nominal voltage U_n direct current 24 V 3,25 W
 power consumption alternating current 230 V 50 Hz 2,90 W

pneumatic specifications

options


actuation pressure range bar see actuation pressure-diagram
air consumption DIN ISO 8573-1 grade of compressed air quality 5/4/3
control preferably 3/2-way pilot valve during low pressure circulation mode
actuator ports 1 G 1/8

⚠ The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.


⚠ If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard
 specifications highlighted in grey are optional


type HPI 08

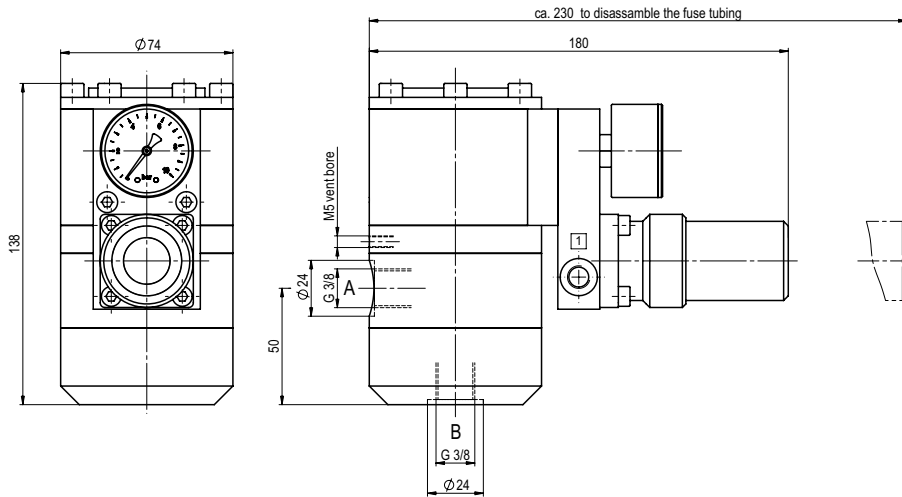

type 3-HPI 08

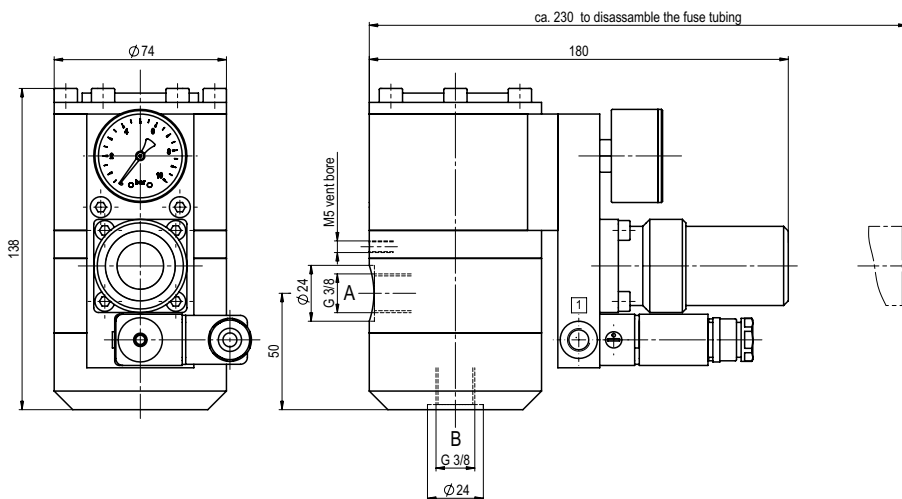

actuation pressure-diagram

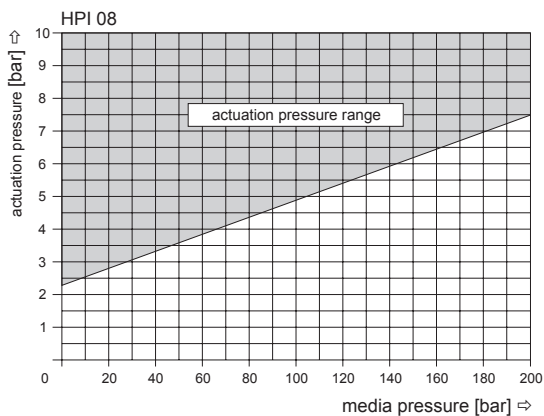

The application-specific layout relating to temperature, pressure conditions, switching behavior, media and its consistency may restrict the range of use or necessitate relevant modifications to materials used and seal arrangements.

Rights reserved to make technical alterations • Not responsible for printing errors • Detailed drawings can be obtained upon request