



positioning valve

type RMQ 15 PC



control valve	electro motorically controlled
pressure range	PN 0-25 bar
orifice	DN 15 mm
connection	thread/cartridge
function	stepless stroke regulation



 Above stated body materials refer to the valve port connections that get in contact with the media only!


design	direct acting with integrated 3-point-regulation
body materials	<div> <div>① aluminium</div> <div>③</div> <div>① brass</div> <div>④</div> <div>②</div> <div>⑥ stainless steel</div> </div>
valve seat	synthetic resin on metal / metal on metal
seal materials	<div> <div>PU, HNBR</div> <div>FPM</div> </div>


details needed

- orifice
- port
- operating pressure/Δp
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage
- control signal

	general specifications	options
ports	RMQ threads G 1/2 - G 3/4	
function	stepless regulation	
pressure range	bar 0-25	
Kv value	DN 15	
	m³/h 0-5,9	
back pressure	bar max. 10	
media	gaseous - liquid - highly viscous - contaminated	
abrasive media		version available
flow direction	A → B as marked	
switching cycles		
operating time	DN 15	
closed - open	sec. ca. 13	
media temperature	°C 0 to +80	
ambient temperature	°C max. +70	
approvals		WAZ
mounting		mounting holes
weight	kg RMQ 2,9	RMQ 4,0

	electrical specifications	options
nominal voltage	U _n 24 V DC	
	U _n 24 V AC	
power consumption	DC < 0,5 A	
	AC < 0,5 A	
control signals	I _E 0-20 mA / 4-20 mA	actual valve output
	U _E 0-10 V	I _A 4-20 mA
protection	IP 65 (P54) acc. DIN 40 050	
energized duty rating	ED 15%	
connection	M12x1 concentric socket DIN 40040, 5 poles / wire diameter 6-8 mm	
additional equipment	internal separate actual value output	



 The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

 If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard
 ■ specifications highlighted in grey are optional


type **RMQ 15 PC**

drilling design for cartridge

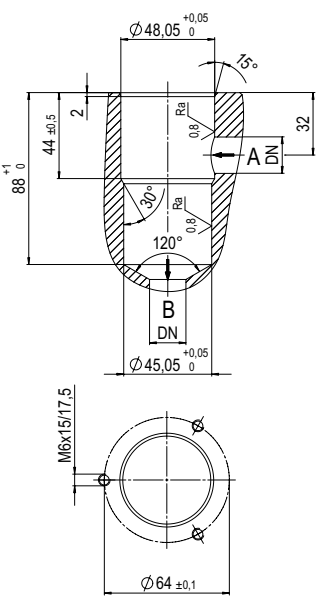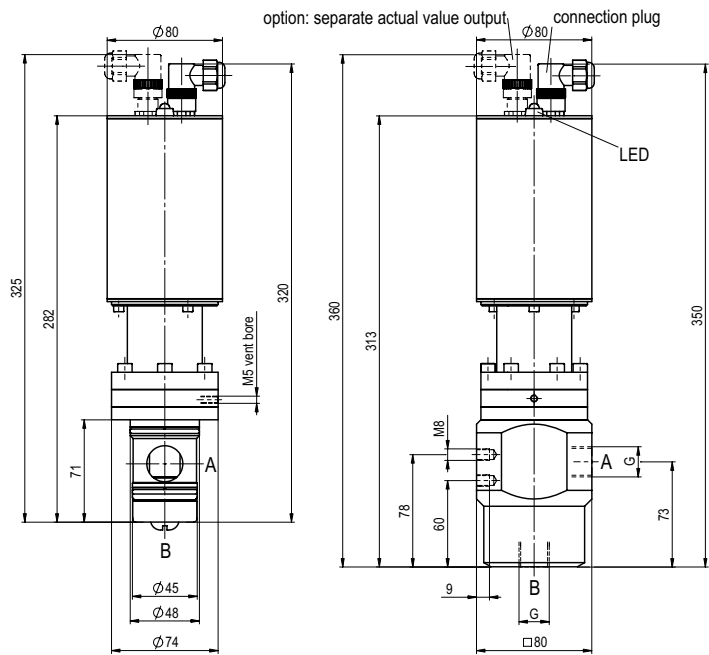


Mounting orientation can be vertical or horizontal, actuator cannot be installed facing down

connection plan /
connection plug



- 1: nominal voltage
- 2: nominal voltage
- 3: control signal
- 4: ground (control signal)
- 5: \oplus

option
separate actual value
output



- 1: actual value 4-20 mA (+)
- 2: actual value 4-20 mA (-)